Air Conditioners And Dehumidifiers

AAC061STA

- 6,000-BTU
- 115-Volt
- 9.7 EER
- Slide-Out Chassis

AAC081STA

- 8,000-BTU
- 115-Volt
- 9.8 EER
- Slide-Out Chassis
- Auto Sweep Air Option

AAC101STA

- 10,000-BTU
- 115-Volt
- 9.8 EER
- Slide-Out Chassis
- Auto Sweep Air Option

AAC121STA

- 12,000-BTU
- 115-Volt
- 9.8 EER
- Slide-Out Chassis
- Auto Sweep Air Option

AAC182STA

- 18,000-BTU
- 230-Volt
- 9.7 EER
- Slide-Out Chassis
- Auto Sweep Air Option

Cool Zone™

BASE FEATURES

- Six-Way Directional Airflow
- Two-Speed Fan
- High-Volume, Low-Noise Side Air Discharge
- Exhaust Air
- Slide-Out Filter
- Optional Window-Mounting Kit
- Optional Charcoal Air Filter

As an ENERGY STAR® Partner, Amana has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.

12M22PC

- 11,700-BTU
- 230-Volt
- 10.0 EER
- Fast Mount™ Slide-Out Chassis

25M33PB

- 25,000-BTU
- 230-Volt
- ENERGY STAR®-Compliant
- 9.5 EER
- Window-Mounting Kit
- Fast Mount™ Slide-Out Chassis

29M43PC

- 29,000-BTU
- 230-Volt
- 8.5 EER
- Window-Mounting Kit
- Fast Mount™ Slide-Out Chassis

For additional feature information, see specification charts on page 60.

(NOT PICTURED)
AAC051FRB

- 5,000-BTU
- 115-Volt
- 9.7 EER
- Fixed Chassis Design

(NOT PICTURED)
AAC081SRB

- 8,000-BTU
- 115-Volt
- 9.8 EER
- Fast Mount™ Slide-Out Chassis

(NOT PICTURED)
AAC121SRA

- 12,000-BTU
- 115-Volt
- 9.8 EER
- Fast Mount™ Slide-Out Chassis

(NOT PICTURED)
AAC141SRA

- 13,800-BTU
- 115-Volt
- 9.8 EER
- Fast Mount™ Slide-Out Chassis

(NOT PICTURED)
AAC182SRA

- 18,000-BTU
- 230-Volt
- 9.7 EER
- Fast Mount™ Slide-Out Chassis

(NOT PICTURED)
AAC202SRA

- 20,000-BTU
- 230-Volt
- 8.5 EER
- Fast Mount™ Slide-Out Chassis

(NOT PICTURED)
AAC242SRA

- 24,400-BTU
- 230-Volt
- 8.5 EER
- Fast Mount™ Slide-Out Chassis

Dehumidifiers

BASE FEATURES

- Removable Washable Dust Filter
- Fits Flush To Wall
- Automatic Shutoff
- Auto Defrost Coil System
- 20-Pint Recessed Water Bucket
- Easy-Roll Casters
- Full-Bucket Indicator Light
- Continuous Drain Option With Drain Hose Connection
- Exclusive Warranty:
  2-Year All Parts/Labor
  5-Year Sealed-System

Bolded items indicate step-up features.

DK25

- Removal Capacity — 25 Pints Per Day
- Single Fan Speed
- Auto Defrost

(NOT PICTURED)
DK40

- **Removal Capacity — 40 Pints Per Day**
- **Dual Fan Speeds**
- Auto Defrost

(NOT PICTURED)
DK55

- **Removal Capacity — 55 Pints Per Day**
- **Dual Fan Speeds**
- Auto Defrost

For additional feature information, see specification charts on pages 61 and 62.

AMANA® AIR CONDITIONERS

CM)

	AAC101STA AAC121STA	AAC182STA
	16 ½ (41.9)	18 (45.7)
	22 (55.9)	27 ¾ (70.5)
	23 ⅝ (60.0)	31 (78.7)
	25 ½ (64.8)	32 ¾ (83.2)
	26 ⅝ – 36 ⅝	32 ¼ – 44
	(67.6 – 93.0)	(81.9 – 111.8)
	10 ⅝ (27.0)	11 ¼ (28.6)

/AAC182STA



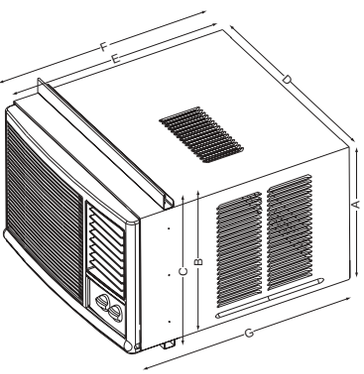

Picture is used for illustrative purposes and is not representative of the models listed on this page.

HI EFFICIENCY® AIR CONDITIONER DIMENSIONS — IN. (CM)

MODEL NUMBER	AAC051FRB	AAC081SB	AAC101SRA	AAC121SRA	AAC141SRA	AAC182SRA AAC202SRA	AAC242SRA
A. Height	12 ½ (31.8)	14 ⅝ (37.2)	15 ¾ (40.0)	15 ¾ (40.0)	17 (43.2)	18 (45.7)	18 (45.7)
B. Height With Bottom Rail*	N.A.	N.A.	16 ½ (41.9)	16 ½ (41.9)	17 ¾ (45.1)	18 ¾ (47.6)	18 ¾ (47.6)
C. Height With Top And Bottom Rail	N.A.	N.A.	18 (45.7)	18 ¼ (46.4)	19 ½ (49.5)	20 ½ (52.1)	20 ½ (52.1)
D. Width	18 ½ (47)	20 ⅛ (51.1)	22 (55.9)	22 (55.9)	26 ¼ (66.7)	27 ¾ (70.5)	27 ¾ (70.5)
E. Depth With Front Off	13 ⅜ (33.7)	12 ⅝ (32.1)	23 ⅝ (60.0)	23 ⅝ (60.0)	26 ¾ (68.0)	31 (78.7)	31 (78.7)
F. Depth With Front On	14 ⅝ (36.9)	17 ¼ (43.8)	25 ½ (64.8)	25 ⅛ (63.8)	27 ½ (69.9)	32 ¾ (83.2)	32 ¾ (83.2)
Fits Window Widths	22 ½ – 33 ⅛	24 – 34 ⅝	26 ⅝ – 36 ⅝	26 ⅝ – 36 ⅝	30 ¾ – 40 ¾	32 ¼ – 44	32 ¼ – 44
	(57-84)	(61.0 – 88.0)	(67.6 – 93.0)	(67.6 – 93.0)	(78.1 – 103.5)	(81.9 – 111.8)	(81.9 – 111.8)
Thru-Wall Max. Wall Thickness	N.A.	2 ½ (6.4)	10 ⅝ (27.0)	10 ⅝ (27.0)	10 ⅝ (27.0)	11 ¾ (29.9)	11¼ (28.6)

** Bottom rail does not detach.*

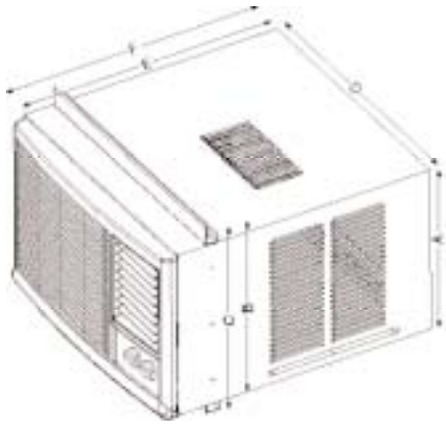

Picture is used for illustrative purposes and is not representative of the models listed on this page.

Amana's ongoing commitment to quality products may mean a change in product specifications without notice.

		DK55
	20	⅞ (53.0)
	13	½ (34.3)
	17	¼ (43.8)
72 (182.9)		
		61 (27.7)